



CHISWEAR

2023


Track Light Specifications

轨 道 灯 规 格 书


上海中誓实业有限公司

Shanghai Chiswear Industrial Co., Ltd.

01



CHIB7515-P-1W

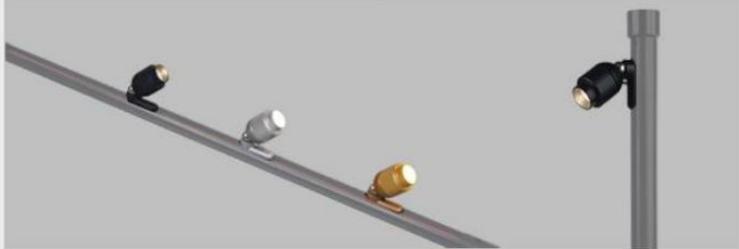

CHIB7515-P-1W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 1W

Lumen: 150Lm

Light angle: 8° 25° 45° 80° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver, gold (free choice)

Lamp housing material: aviation aluminum

Working method: Combination of conductive magnetic block and track wire


Driving voltage: DC12V DC24V can be customized

Product net weight: 15g


Product gross weight: 20g

Carton packaging: 60mm*40mm*20mm

02



CHIB7519-P-2W

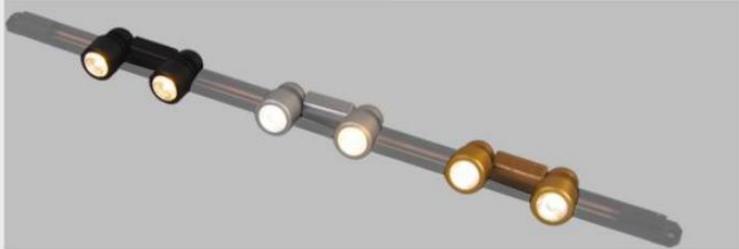

CHIB7519-P-2W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 2*1W

Lumen: 150Lm*2

Light angle: 8° 25° 45° 80° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver, gold (free choice)

Lamp housing material: aviation aluminum

Working method: Combination of conductive magnetic block and track wire


Driving voltage: DC12V DC24V can be customized

Product net weight: 40g


Product gross weight: 42g

Carton packaging: 65mm*45mm*15mm

03



CHIB7520-P-1W

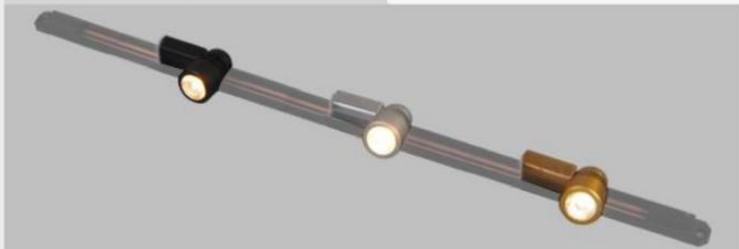

CHIB7520-P-1W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 1W

Lumen: 150Lm

Light angle: 8° 25° 45° 80° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver, gold (free choice)

Lamp housing material: aviation aluminum

Working method: Combination of conductive magnetic block and track wire


Driving voltage: DC12V DC24V can be customized

Product net weight: 15g


Product gross weight: 20g

Carton packaging: 60mm*40mm*20mm

04



CHIB7517-P-2W

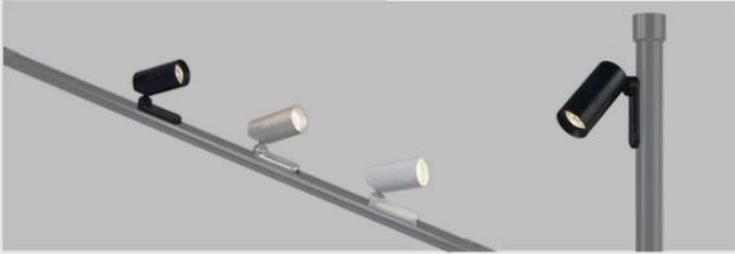

CHIB7517-P-2W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 2W

Lumen: 210Lm

Light angle: 8° 25° 45° 80° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver, gold (free choice)

Lamp housing material: aviation aluminum

Working method: Combination of conductive magnetic block and track wire


Driving voltage: DC12V DC24V can be customized

Product net weight: 30g


Product gross weight: 35g

Carton packaging: 70mm*60mm*22mm

05



CHIB7522-P-2W

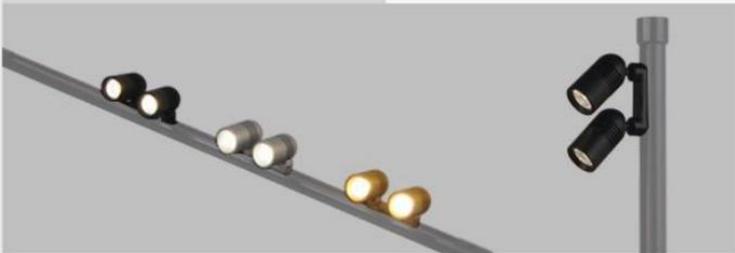

CHIB7522-P-2W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 2*1W

Lumen: 150Lm*2

Light angle: 8° 25° 45° 80° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver, gold (free choice)

Lamp housing material: aviation aluminum

Working method: Combination of conductive magnetic block and track wire


Driving voltage: DC12V DC24V can be customized

Product net weight: 25g

Product gross weight: 30g

Carton packaging: Ziplock bag

06



CHIB7520-P-1W



CHIB7520-P-1W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 1W

Lumen: 150Lm

Light angle: 8° 25° 45° 80° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver, gold (free choice)

Lamp housing material: aviation aluminum

Working method: Combination of conductive magnetic block and track wire


Driving voltage: DC12V DC24V can be customized

Product net weight: 20g

Product gross weight: 25g

Carton packaging: 60mm*40mm*20mm

07



CHIB7523-P-3W



CHIB7523-P-3W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 3W

Lumen: 210Lm

Light angle: 10° - 60° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver(free choice)

Lamp housing material: aviation aluminum

Working method: Combination of conductive
magnetic block and track wire


Driving voltage: DC12V DC24V can be customized

Product net weight: 35g

Product gross weight: 37g

Carton packaging: Ziplock bag

08



CHIB7527-P-3W



CHIB7527-P-3W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 3W

Lumen: 300Lm

Light angle: 15° 30° 60° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver, white, gold (free choice)

Lamp housing material: aviation aluminum

Working method: Combination of conductive
magnetic block and track wire


Driving voltage: DC12V DC24V can be customized

Product net weight: 25g

Product gross weight: 30g

Carton packaging: Ziplock bag

09



CHIB7538-P-7W



CHIB7538-P-7W

Chip: OSRAM (OSRAM)

Display finger: Ra90

Power: 7W

Lumen: 600Lm

Light angle: 10° 45° 90° (free choice)

Light color: 3000k 4000K 6000K (free choice)

Shell color: black, silver (free choice)

Lamp housing material: aviation aluminum

Working method: Aviation aluminum and
aluminum honeycomb glare mesh

Driving voltage: DC12V DC24V can be customized

Product net weight: 65g

Product gross weight: 67g

Carton packaging: Ziplock bag

10




T01


**T01**

Flat rail material: aviation aluminum and the surface anodized treatment
 Rail wire: pure copper copper foil 75um and iron substrate
 Rail current: maximum current 8A
 Input voltage: DC12V DC24V
 Shell color: black, silver, white (free choice)
 Installation method:
 Combined with glass-fixed by nano glue
 Combined with solid wood - fixed with wood screws
 Combination with iron pipe - fixed by soft magnetic strip (purchased separately)
 Product net weight: 160g/m
 Product gross weight: 170g
 Packing material: plastic film bag

11

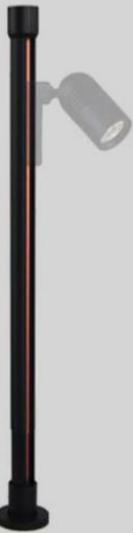


T02

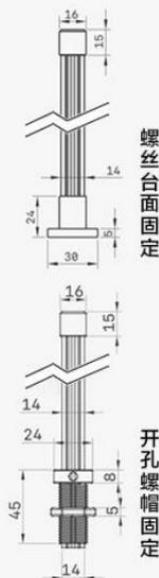**T02**

Round rail material: aviation aluminum and the surface anodized treatment
 Rail wire: pure copper copper foil 75um and iron substrate
 Track current: maximum current 8A
 Input voltage: DC12V DC24V
 Shell color: black, silver, white (free choice)
 Installation method:
 Surface mounted base - fixed with screws
 18mm in the hole for concealed installation - fixed with upper thread nut
 Product net weight: 245g/m
 Product gross weight: 255g
 Packing material: plastic film bag

12

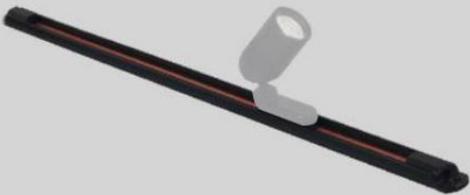

T03


**T03**

Flat rail material: PC material
 Rail wire: pure copper copper foil 75um and iron substrate
 Rail current: maximum current 8A
 Input voltage: DC12V DC24V
 Shell color: black, silver, white (free choice)
 Installation method:
 Combined with glass-fixed by nano glue
 Combined with solid wood - fixed with wood screws
 Combination with iron pipe - fixed by soft magnetic strip (purchased separately)
 Product net weight: 120g/m
 Product gross weight: 130g
 Packing material: plastic film bag

13



Track Connect

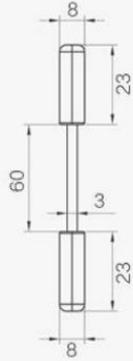

Track Connector

Material: 3D printing resin

Connecting wire: 0.25m²

Wire current: maximum current 4A

Wire length: 60mm

Working method: magnetic connection with track wire

Input voltage: DC12V or DC24V



Product net weight: 10g

Packing material: Ziplock bag

14



Power Connect

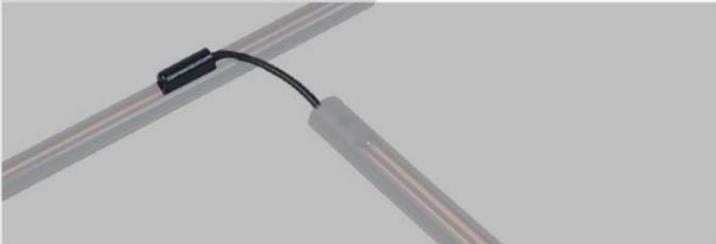

Power Connector

Material: 3D printing resin

Connecting wire: 0.25m²

Wire current: maximum current 4A

Wire length: 500mm

Working method: magnetic connection with track wire

Input voltage: DC12V or DC24V


Product net weight: 10g

Packing material: Ziplock bag

15



Transformer



Transformer

CHS-18W (H20*W20*L195mm)12V/24V

CHS-25W (H38*W60*L86mm)12V/24V

CHS-50W (H38*W80*L110mm)12V/24V

CHS-75W(H38*W100*L160mm)12V/24V

CHS-100W(H38*W100*L200mm)12V/24V

CHS-145W (H38*W100*L200mm)12V/24V

CH S-200W (H50*W120*L220mm)12V/24V

CHISWEAR

Shanghai Chiswear Industrial Co., Ltd.

上 海 中 誓 实 业 有 限 公 司

Adresss: Room 302, Yonglehui Cultural And Creative

Park, No. 4292, Hutai Road, Shanghai, China

Telephone: 0086-21-66390768

Email: Info@chiswear.com

Website: www.chiswear.com